

Made to be seen. And heard.

Dell 27 Plus QHD Monitor

MODEL: S2725DS

The world's # 1 monitor company*



Experience impressive visuals with outstanding acoustics in a lifestyle-inspired design

Stunning visuals and built-in acoustic excellence

Modern, lifestyle-inspired design with ultrathin bezels let you enjoy the stunning screen with less distraction.

Enjoy impressive audio with the integrated dual 5W speakers with a wide dynamic range. Easy options of 5 preset and 1 customizable audio profiles to tailor for every moment.

Experience consistent vibrant colors across a wide viewing angle enabled by In-plane switching technology with 99% sRGB color coverage.

With QHD (2560 x 1440) resolution, you'll get 1.77 times more details than Full HD.

Designed with everyday versatility and comfort in mind

Connect with ease with convenient primary connections and easy side-access to secondary connections that offer multiple input ports in a multi-device setup. An improved cable management design offers a more pleasing, clutter-free set up that optimize your desk space. You can also navigate and manage the OSD menus with new joystick and shortcut buttons on the back of the monitor.

Seamlessly switch between streaming and casual gaming with the built-in dual HDMI connectivity ports.

Customize your view with tilt, swivel, pivot and adjust the height of your monitor for a comfortable setup all day long.

Enhanced eye comfort

This 27" monitor achieves
TÜV Rheinland® 4-star eye comfort
certification — the latest industry
standard for eye comfort to help reduce
signs of eye fatigue.

Benefit from improved ComfortView Plus, a built-in feature that reduces blue light emission to less than 35%, and the 100Hz variable refresh rate that delivers smoother motion visuals, ensuring seamless viewing experience and perfect for casual gaming sessions.



Click here to explore more.


World's number 1 monitor company*

We deliver world-class monitors that have gone through rigorous development processes and stringent tests to ensure dependable performance. Get peace of mind with unmatched warranty and support options. Being environmentally forward in thinking, our monitors adhere to environment standards and are made with sustainable materials.

Designed for you

Stylish-setup for ease of use and all-day comfort.





Navigate the onscreen menu and adjust settings with a convenient joystick control.



Connect with ease

New clutter-free design with improved cablemanagement and convenient side-access port.


Dell Display and Peripheral Manager

Stay organized between applications, emails and windows on one screen using Easy Arrange¹ and boost productivity while working from home.



Comfort from every angle

Tilt, swivel, pivot and adjust the height of your monitor to match any activity, in any space.

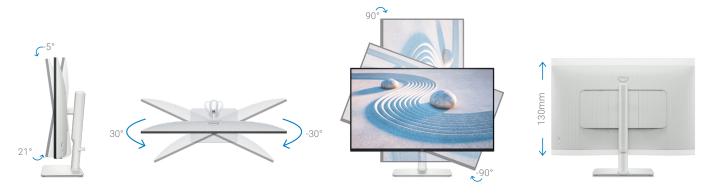



Driving sustainability through thoughtful design

Material innovation

Your monitor has been thoughtfully crafted with a selection of sustainable materials including 85% post consumer plastic and closed-loop ITE-derived plastic¹, 100% recycled aluminum¹ and at least 20% recycled glass.² Using recycled materials helps conserve natural resources and contributes to a lower environmental footprint.

Low impact packaging


This monitor ships with reduced plastic³ and is in a box made with 100% renewable materials that is recyclable.⁴ Dell is shifting a cushioning solution derived entirely from fiber that is kinder to the environment.³

Energy conservation and environmental standards

Using PowerNap mode in Dell Display and Peripheral Manager lowers energy use by up to 14.8%. This monitor is certified to ENERGY STAR® 8.06 meaning it meets high standards for energy efficiency.

- Recycled aluminum is in monitor stand. Post-consumer recycled plastic: 73.2%; Closed loop ITE-derived plastic: 12.2% (ITE derived post-consumer recycled plastic: Materials that are derived from discarded products listed under IT and Telecommunications. Percentage is based on plastic weight and may vary by model. Based on internal analysis, December 2023).
- 2 Recycled glass in present in monitor panel. Applicable to all P-series, S-series and E-series monitors launching in CY2024. Based on internal analysis, January 2024.
- 3 Based on internal analysis, January 2024. Applies to all new P series and S series monitors launching in Cy2024. 22% average reduction in plastic use is based on the removal of EPE foam.
- 4 Applies to all Dell monitors launched since 2023. Made from FSC mix sources which is a mix of material from FSC certified forests, recycled content and/or FSC controlled wood. Based on internal analysis, August 2023.
- 5 The calculation assumes the monitor is used for 10 hours a day, including 1.5 hours of idle time with display in sleep mode when the device screensaver is on. Based on internal analysis, May 2023.
- 6 Based on internal analysis, December 2023.

Ports & Slots

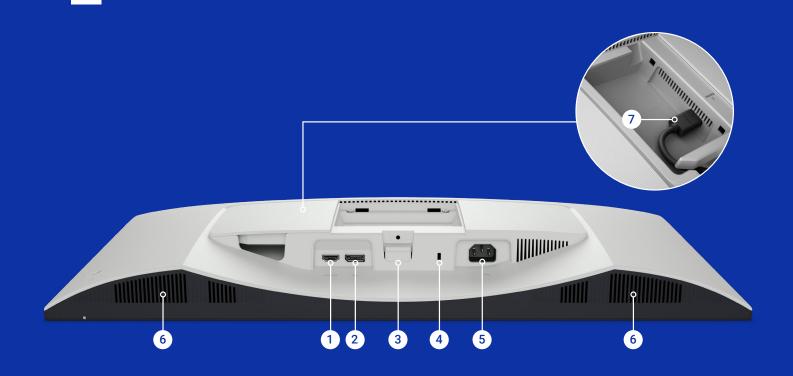

- 1 HDMI port 1¹
- 2 DisplayPort
- **3** Stand release button
- 4 Security lock slot²
- **5** Power connector
- **6** Speakers
- 7 HDMI port 2¹

Due to a version policy update from HDMI Org., HDMI 2.0 no longer exists, and it has been changed to a sub-set in HDMI 2.1 with protocol name "TMDS".

HDMI 2.0 - HDMI (TMDS as per specified in HDMI 2.1) - TMDS (Transition Minimized Differential Signaling) is a protocol tech. used to transmit video and audio data for HDMI versions up to HDMI 2.0.

HDMI 2.1 - HDMI (FRL as per specified in HDMI 2.1) - FRL (Fixed Rate Link) is a protocol tech. used to transmit video and audio data starting from HDMI 2.1 for higher data rate.

| FEATURE | TECHNICAL SPECIFICATION |
|--|--|
| MODEL | Dell 27 Plus QHD Monitor - S2725DS |
| DIAGONAL VIEWING SIZE | 68.47 cm 27 Inches |
| PRESET DISPLAY AREA (H X V) | 596.74 mm x 335.66 mm 23.49" x 13.22" |
| PANEL TYPE | In-Plane Switching (IPS) technology |
| DISPLAY SCREEN COATING | Antiglare with hard-coating 3H |
| MAXIMUM PRESET RESOLUTION | 2560 x 1440 |
| REFRESH RATE | 100 Hz |
| VIEWING ANGLE | (178° vertical / 178° horizontal) |
| PIXEL PITCH | 0.2331 mm x 0.2331 mm |
| PIXEL PER INCH (PPI) | 109 |
| CONTRAST RATIO | 1500: 1 (typical) |
| ASPECT RATIO | 16:9 |
| BACKLIGHT TECHNOLOGY | LED edgelight system |
| BRIGHTNESS | 350 cd/m² (typical) |
| RESPONSE TIME | 8 ms (Normal mode) 5 ms (Fast mode) 4 ms (Extreme mode¹) |
| COLOR SUPPORT | Color Gamut (typical): 99% sRGB (typical) (CIE1931) Color Depth: 16.7 million colors |
| TÜV EYE COMFORT | Yes, 4 Star |
| FLICKER FREE | Yes |
| CONNECTIVITY | 2 x HDMI (HDCP 1.4) (Supports up to QHD 2560 x 1440 100 Hz TMDS, VRR as per specified in HDMI 2.1) 1 x DisplayPort 1.2 (HDCP1.4) (Supports up to QHD 2560 x 1440 100 Hz, VRR) |
| VRR | Yes |
| ADJUSTABILITY | Height-Adjustability Stand 130 mm Tilt -5° to 21° Swivel -30° to 30° Pivot -90° to 90° |
| DAISY CHAIN AVAILABILITY | No |
| DELL DISPLAY AND PERIPHERAL MANAGER COMPATIBILITY | Yes with Easy Arrange ² |

| VOLTAGE REQUIRED 100 VAC to 240 VAC/50 Hz or 60 Hz ± 3 Hz/1.5 A CONSUMPTION 0.3 W (Off mode)³ 0.3 W (Standby Mode)³ 57 W (Maximum)³ 19.2 W (Pon)³ 60.58 kWh (TEC)⁵ AUDIO OUTPUT Integrated 2 x 5W speakers HEIGHT WITH STAND (COMPRESSED - EXTENDED) 388.63 mm (15.30 in.) - 518.63 mm (20.42 in.) WIDTH WITH STAND 611.34 mm (24.07 in.) DEPTH WITHOUT STAND 355.98 mm (14.02 in.) WIDTH WITHOUT STAND 611.34 mm (24.07 in.) WIDTH WITHOUT STAND 58.81 mm (2.32 in.) WEIGHT (PANEL ONLY) - FOR VESA MOUNT) 4.49 kg (9.90 lb) VEIGHT (WITH PACKAGING) 8.64 kg (19.05 lb) SECURITY Security-lock slot (for Kensington locks, sold separately) PACKAGING) *ROHS-compliant STANDARDS *BFR/PVC Fed laminates.) - Arsenic-free glass and Mercury-free for the panel only - ENERGY STAR® certified monitor *FLAT PANEL MOUNT INTERFACE VESA (100 mm) **HUMIDITY RANGE Operating: 0° to 40°C (32° to 104°F) Non-operating: 20° to 60° (-4° to 140° F) **HUMIDITY RANGE Operating: 10% to 80% (non-condensing) **HUMIDITY RANGE Operating: 10% to 80% (non-condensing) **WHAT'S INCLUDED *Non-Operating: 20° to 60° (-4° to 140° F) ** | FEATURE | TECHNICAL SPECIFICATION |
|--|------------------|---|
| CONSUMPTION 0.3 W (Standby Mode)³ 21.4 W (Yon Mode)³ 57 W (Maximum)³ 19.2 W (Pon)³ 6.958 KWh (TEO)³ AUDIO OUTPUT Integrated 2 x 5W speakers HEIGHT WITH STAND (COMPRESSED ~ EXTENDED) WIDTH WITH STAND 611.34 mm (24.07 in.) DEPTH WITH STAND DEPTH WITHOUT STAND WIDTH WITHOUT STAND 611.34 mm (24.07 in.) WIDTH WITHOUT STAND DEPTH WITHOUT STAND WEIGHT (PANEL ONLY - 58.81 mm (2.32 in.) WEIGHT (WITH PACKAGING) SECURITY SECURI | VOLTAGE REQUIRED | 100 VAC to 240 VAC/50 Hz or 60 Hz ± 3 Hz/1.5 A |
| HEIGHT WITH STAND (COMPRESSED - EXTENDED) WIDTH WITH STAND DEPTH WITH STAND DEPTH WITH STAND MIDTH WITHOUT STAND WIDTH WITHOUT STAND MIDTH WITHOUT STAND DEPTH WITHOUT STAND MEIGHT (PANEL ONLY - FOR VESA MOUNT) WEIGHT (WITH BERZY - SECURITY COMPLIANT STAND SECURITY COMPLIANT STANDARDS FLAT PANEL MOUNT INTERFACE TEMPERATURE RANGE Operating: 0° to 40°C (32° to 104°F) Non-operating: -20° to 60° (-4° to 140° F) Non-operating: -20° to 60° (-4° to 140° F) Non-operating: 5% to 90% (non-condensing) Non-Operating: 5% to 90% (non-condensing) WHAT'S INCLUDED TEMPATORE WHAT'S INCLUDED STANDARD SERVICE PLAN (US/Canada) 1-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange Service® & Pre | | 0.3 W (Standby Mode) ³ 21.4 W (On Mode) ³ 57 W (Maximum) ⁴ 19.2 W (Pon) ⁵ |
| (COMPRESSED ~ EXTENDED) WIDTH WITH STAND DEPTH WITH STAND WIDTH WITHOUT STAND WIDTH WITHOUT STAND DEPTH WITHOUT STAND MIDTH WITHOUT STAND DEPTH WITHOUT STAND WEIGHT (PANEL ONLY - FOR VESA MOUNT) WEIGHT (WITH PACKAGING) SECURITY COMPLIANT STANDARDS SECURITY Security-lock slot (for Kensington locks, sold separately) ROMPLIANT STANDARDS FLAT PANEL MOUNT STANDARDS FLAT PANEL MOUNT STANDARDS FLAT PANEL MOUNT STANDARDS FLAT PANEL MOUNT STANDARDS TEMPERATURE RANGE Operating: 0° to 40°C (32° to 104°F) Non-operating: -20° to 60° (-4° to 140° F) Non-Operating: 5% to 90% (non-condensing) Non-Operating: 5% to 90% (non-condensing) Non-Operating: 12,192 m (40,000 ft) max Non-Operating: 12,192 m (40,000 ft) max WHAT'S INCLUDED STANDARD SERVICE PLAN WHAT SANDARD SERVICE PLAN (US/Canada) 1-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange | AUDIO OUTPUT | Integrated 2 x 5W speakers |
| DEPTH WITH STAND ### BIGHT WITHOUT STAND ### WIDTH WITHOUT STAND ### BEIGHT (WITHOUT STAND) ### BEIGHT (WITHOUT STAND) ### BEIGHT (WITHOUT STAND) ### BEIGHT (WITH STAND) ### BEIGHT (WITH PACKAGING) ### SECURITY ### COMPLIANT STANDARDS ### STANDARDS ### BEIGHT (WITH PACKAGING) ### SECURITY ### COMPLIANT STANDARDS ### BER/PVC reduce monitor (The circuit boards are made from BFR/PVC-free laminates.) ### Aresnic-free glass and Mercury-free for the panel only ### ENERGY STAR® certified monitor ### FLAT PANEL MOUNT INTERFACE ### TEMPERATURE RANGE ### Departing: 0° to 40°C (32° to 104°F) ### Non-operating: -20° to 60° (-4° to 140° F) ### Non-Operating: 5% to 90% (non-condensing) ### Non-Operating: 5% to 90% (non-condensing) ### ALTITUDE ### Operating: 5,000 m (16,400 ft) max ### Non-Operating: 12,192 m (40,000 ft) max ### WHAT'S INCLUDED ### WHAT'S INCLUDED ### AMONITOR STANDARD SERVICE PLAN ### US/SA cover ### Operating: -20° to 40° C 42° to 140° F) ### Operating: 5,000 m (16,400 ft) max ### Operating: 5% to 90% (non-condensing) ### Operating: 12,192 m (40,000 ft) max ### Operating: 12,192 m (40,000 ft) max ### US/SA cover ### Operating: -20° to 40° C 42° to 140° F) ### Operating: -20° to 40° C 42° to 140° F) ### Operating: -20° to 60° C 40° to 140° F) ### Operating: -20° to 60° C 40° to 140° F) ### Operating: -20° to 60° C 40° to 140° F) ### Operating: -20° to 60° C 40° to 140° F) ### Operating: -20° to 60° C 40° to 140° F) ### Operating: -20° to 60° C 40° to 140° F) ### Operating: -20° to 60° C 40° to 140° F) ### Operating: -20° to 60° C 40° to 140° F) ### Operating: -20° to 60° C 40° to 140° F) ### Operating: -20° to 40° C 40° C 40° To 140° F) ### Operating: -20° to 40° C 40° To 140° F) ### Operating: -20° to 40° C 40° To 140° F) ### Operating: -20° to 40° C 40° C 40° To 140° F) ### Operating: -20° to 40° C 40° To 140° F) ### Operating: -20° to 40° C 40° To 140° F) ### Operating: -20° to 40° C 40° To 140° F) ### Operating: -20° to 40° C 40° To 140° F) ### Oper | (COMPRESSED ~ | 388.63 mm (15.30 in.) - 518.63 mm (20.42 in.) |
| HEIGHT WITHOUT STAND WIDTH WITHOUT STAND DEPTH WITHOUT STAND MEIGHT (PANEL ONLY FOR VESA MOUNT) WEIGHT (WITH PACKAGING) SECURITY COMPLIANT STANDARDS SECURITY COMPLIANT STANDARDS FLAT PANEL MOUNT STANDARDS FLAT PANEL MOUNT VESA (100 mm) ALTITUDE Operating: 0° to 40°C (32° to 104°F) Non-operating: -20° to 60° (-4° to 140° F) Non-Operating: 5% to 90% (non-condensing) Non-Operating: 5% to 90% (non-condensing) ALTITUDE WHAT'S INCLUDED ALTITUDE OPERATING: Non-Operating: 1.2, 192 m (40,000 ft) max Non-Operating: 1.2, 192 m (40,000 ft) max VESA (100 cover VESA (100 cover Power cable 11 x HDMI cable Quick setup guide 2 Safety, Environmental, and Regulatory Information STANDARD SERVICE PLAN (US/Canada) 1-year Advanced Exchange Service® Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange Service® & Premium Pane | WIDTH WITH STAND | 611.34 mm (24.07 in.) |
| WIDTH WITHOUT STAND DEPTH WITHOUT STAND MEIGHT (PANEL ONLY FOR VESA MOUNT) WEIGHT (WITH PACKAGING) SECURITY SEC | DEPTH WITH STAND | 200.38 mm (7.89 in.) |
| DEPTH WITHOUT STAND DEPTH WITHOUT STAND WEIGHT (PANEL ONLY - FOR VESA MOUNT) WEIGHT (WITH PACKAGING) SECURITY Security-lock slot (for Kensington locks, sold separately) COMPLIANT STANDARDS BFR/PVC reduce monitor (The circuit boards are made from BFR/PVC-free laminates.) Arsenic-free glass and Mercury-free for the panel only ENERGY STAR® certified monitor FLAT PANEL MOUNT INTERFACE TEMPERATURE RANGE Operating: 0° to 40°C (32° to 104°F) Non-operating: -20° to 60° (-4° to 140° F) HUMIDITY RANGE Operating: 10% to 80% (non-condensing) Non-Operating: 5% to 90% (non-condensing) ALTITUDE Operating: 5,000 m (16,400 ft) max Non-Operating: 12,192 m (40,000 ft) max WHAT'S INCLUDED Monitor Stand riser and base Side I/O Cover VESA cover Power cable 1 x HDMI cable Quick setup guide Safety, Environmental, and Regulatory Information STANDARD SERVICE PLAN Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange (WW) 3-year Advanced Exchange Service® & Premium Panel Exchange | | 355.98 mm (14.02 in.) |
| WEIGHT (PANEL ONLY FOR VESA MOUNT) WEIGHT (WITH PACKAGING) SECURITY SECUR | | 611.34 mm (24.07 in.) |
| - FOR VËSA MOUNT) WEIGHT (WITH PACKAGING) SECURITY SE | | 58.81 mm (2.32 in.) |
| PACKAĞINĞ) SECURITY Security-lock slot (for Kensington locks, sold separately) COMPLIANT STANDARDS BFR/PVC reduce monitor (The circuit boards are made from BFR/PVC-free laminates.) Arsenic-free glass and Mercury-free for the panel only ENERGY STAR® certified monitor FLAT PANEL MOUNT INTERFACE TEMPERATURE RANGE Operating: 0° to 40°C (32° to 104°F) Non-operating: -20° to 60° (-4° to 140° F) Non-operating: 5% to 90% (non-condensing) Non-Operating: 5% to 90% (non-condensing) ALTITUDE Operating: 5,000 m (16,400 ft) max Non-Operating: 12,192 m (40,000 ft) max WHAT'S INCLUDED Monitor Stand riser and base Side I/O Cover VESA cover Power cable 1 x HDMI cable Quick setup guide Safety, Environmental, and Regulatory Information STANDARD SERVICE PLAN (US/Canada) 1-year Advanced Exchange Service ⁶ & Premium Panel Exchange (WW) 3-year Advanced Exchange Service ⁶ & Premium Panel Exchange | | 4.49 kg (9.90 lb) |
| COMPLIANT STANDARDS • RoHS-compliant • BFR/PVC reduce monitor (The circuit boards are made from BFR/PVC-free laminates.) • Arsenic-free glass and Mercury-free for the panel only • ENERGY STAR® certified monitor FLAT PANEL MOUNT INTERFACE TEMPERATURE RANGE Operating: 0° to 40°C (32° to 104°F) Non-operating: -20° to 60° (-4° to 140° F) Non-operating: 5% to 90% (non-condensing) Non-Operating: 5% to 90% (non-condensing) ALTITUDE Operating: 5% to 90% (non-condensing) ALTITUDE Operating: 10% to 80% (non-condensing) Non-Operating: 12,192 m (40,000 ft) max WHAT'S INCLUDED • Monitor • Stand riser and base • Side I/O Cover • VESA cover • Power cable • 1 x HDMI cable • Quick setup guide • Safety, Environmental, and Regulatory Information STANDARD SERVICE PLAN (US/Canada) 1-year Advanced Exchange Service ⁶ & Premium Panel Exchange (WW) 3-year Advanced Exchange Service ⁶ & Premium Panel Exchange | | 8.64 kg (19.05 lb) |
| STANDARDS BFR/PVC reduce monitor (The circuit boards are made from BFR/PVC-free laminates.) Arsenic-free glass and Mercury-free for the panel only ENERGY STAR® certified monitor FLAT PANEL MOUNT INTERFACE TEMPERATURE Operating: 0° to 40°C (32° to 104°F) Non-operating: -20° to 60° (-4° to 140° F) HUMIDITY RANGE Operating: 10% to 80% (non-condensing) Non-Operating: 5% to 90% (non-condensing) ALTITUDE Operating: 5,000 m (16,400 ft) max Non-Operating: 12,192 m (40,000 ft) max WHAT'S INCLUDED "Monitor Stand riser and base Side I/O Cover VESA cover Power cable 1 x HDMI cable Quick setup guide Safety, Environmental, and Regulatory Information STANDARD SERVICE PLAN (US/Canada) 1-year Advanced Exchange Service ⁶ & Premium Panel Exchange (WW) 3-year Advanced Exchange Service ⁶ & Premium Panel Exchange Panel Pa | SECURITY | Security-lock slot (for Kensington locks, sold separately) |
| TEMPERATURE RANGE Operating: 0° to 40°C (32° to 104°F) Non-operating: -20° to 60° (-4° to 140° F) HUMIDITY RANGE Operating: 10% to 80% (non-condensing) Non-Operating: 5% to 90% (non-condensing) ALTITUDE Operating: 5,000 m (16,400 ft) max Non-Operating: 12,192 m (40,000 ft) max WHAT'S INCLUDED 'Monitor Stand riser and base Side I/O Cover VESA cover Power cable 1 x HDMI cable Quick setup guide Safety, Environmental, and Regulatory Information STANDARD SERVICE PLAN (US/Canada) 1-year Advanced Exchange Service ⁶ & Premium Panel Exchange (WW) 3-year Advanced Exchange Service ⁶ & | | BFR/PVC reduce monitor (The circuit boards are made from BFR/PVC-free laminates.) Arsenic-free glass and Mercury-free for the panel only |
| HUMIDITY RANGE Operating: -20° to 60° (-4° to 140° F) HUMIDITY RANGE Operating: 10% to 80% (non-condensing) Non-Operating: 5% to 90% (non-condensing) ALTITUDE Operating: 5,000 m (16,400 ft) max Non-Operating: 12,192 m (40,000 ft) max • Monitor • Stand riser and base • Side I/O Cover • VESA cover • Power cable • 1 x HDMI cable • Quick setup guide • Safety, Environmental, and Regulatory Information STANDARD SERVICE PLAN US/Canada) 1-year Advanced Exchange Service ⁶ & Premium Panel Exchange (WW) 3-year Advanced Exchange Service ⁶ & Premium Panel Exchange (WW) 3-year Advanced Exchange Service ⁶ & Premium Panel Exchange | | VESA (100 mm) |
| Non-Operating: 5% to 90% (non-condensing) ALTITUDE Operating: 5,000 m (16,400 ft) max Non-Operating: 12,192 m (40,000 ft) max • Monitor • Stand riser and base • Side I/O Cover • VESA cover • Power cable • 1 x HDMI cable • Quick setup guide • Safety, Environmental, and Regulatory Information STANDARD SERVICE PLAN (US/Canada) 1-year Advanced Exchange Service ⁶ & Premium Panel Exchange (WW) 3-year Advanced Exchange Service ⁶ & Premium Panel Exchange | | |
| Non-Operating: 12,192 m (40,000 ft) max WHAT'S INCLUDED • Monitor • Stand riser and base • Side I/O Cover • VESA cover • Power cable • 1 x HDMI cable • Quick setup guide • Safety, Environmental, and Regulatory Information STANDARD SERVICE PLAN (US/Canada) 1-year Advanced Exchange Service ⁶ & Premium Panel Exchange (WW) 3-year Advanced Exchange Service ⁶ & | HUMIDITY RANGE | |
| Stand riser and base Side I/O Cover VESA cover Power cable 1 x HDMI cable Quick setup guide Safety, Environmental, and Regulatory Information STANDARD SERVICE PLAN US/Canada) 1-year Advanced Exchange Service ⁶ & Premium Panel Exchange (WW) 3-year Advanced Exchange Service ⁶ & Premium Panel Exchange | ALTITUDE | |
| PLAN Premium Panel Exchange (WW) 3-year Advanced Exchange Service ⁶ & | WHAT'S INCLUDED | Stand riser and base Side I/O Cover VESA cover Power cable 1 x HDMI cable Quick setup guide |
| | | Premium Panel Exchange (WW) 3-year Advanced Exchange Service ⁶ & |

Technical specifications subject to change without prior notice. Product availability varies by country. Please contact your Dell representative for more information.

© 2025 Dell Inc. or its subsidiaries. All Rights Reserved. Dell Technologies, Dell, EMC, Dell EMC and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners. USB Type-C° and USB-C° are registered trademarks of USB Implementers Forum. Thunderbolt and the Thunderbolt logo are trademarks of Intel Corporation in the U.S. and/or other countries.

¹ Reduced visible motion blur and increased image responsiveness. NOTE: Using Extreme mode might introduce minor and noticeable visual artifacts in the image. You can choose Normal or Fast mode to mitigate these visual artifacts.

² Requires Dell Display and Peripheral Manager software installation.

³ As defined in EU 2019/2021 and EU 2019/2013.

 $^{4 \}quad \text{Max brightness and contrast setting with maximum power loading on all USB ports.}$

Pon: Power consumption of On mode as defined in Energy Star 8.0 version. TEC: Total energy consumption in kWh as defined in Energy Star 8.0 version.

⁶ Advanced Exchange Service: Replacement part/unit dispatched, if needed, following completion of phone/online diagnosis. Fee charged for failure to return defective unit. Availability varies. Other conditions apply.