



# CONNECTRIX MDS 9700 ENTERPRISE DIRECTORS

Supports up to 64Gb/s Fibre Channel line rate performance

## Performance, scalability, high availability, analytics, automation and investment protection

The Dell Connectrix™ MDS 9700 Directors have a fault-tolerant design and multiprotocol flexibility to support non-stop operations. The Connectrix MDS 9700 address the stringent requirements of large, virtualized data center storage environments. The MDS 9700 Directors provide high availability, scalability, security and ease of management with outstanding performance and powerful features for the all-flash, virtualized data center. All Connectrix MDS 16-, 32- and 64Gb/s platforms support NVMe/FC. Connectrix MDS Directors support the concurrent use of both traditional Fibre Channel and NVMe storage traffic, allowing organizations to seamlessly integrate Fibre Channel networks with next-generation NVMe-based storage, without a disruptive rip-and-replace.

### Connectrix MDS Director Chassis Models

There are three Connectrix MDS 9700 director chassis models to address all your storage networking requirements. All chassis models include dual supervisor modules, fabric modules, fans and power supplies as noted in the specifications below. The director models support 64-, 32- and 16Gb/s Fibre Channel line rate ports as well as NVMe/FC and FCiP protocols. The MDS-9710-V2 and MDS-9706-V2 also support mainframe FICON.

- MDS-9706-V2 – with four switching module slots, these directors provide up to 192 ports per chassis
- MDS-9710-V2 – with eight switching module slots each, these models support up to 384 ports per chassis
- MDS-9718-V3 – sixteen switching module slots, deliver up to 768 ports per chassis to enable consolidation at scale

### Connectrix MDS Standard Features

Includes Port Channel, VSAN, VSAN Trunking, Inter-VSAN Routing, NPV, ISL and HBA Diagnostics, 10Gb/s Fibre Channel, Port Monitoring, Slow Drain (Congestion) Detection, Virtual machine transparency, hardware-enforced zoning, ACLs, per VSAN Role-based Access Control (RBAC), QoS policies, sophisticated diagnostics and more.

### Connectrix MDS Optional Licensed Key Features

**Enterprise License** – includes advanced traffic engineering—quality of service (QoS), zoned-based QoS and network security features such as IVR, Fibre Channel Security Protocol (FCSP), port security, VSAN-based access control, fabric binding, IPsec and IKE for IPv4, IKE Digital certificates, enhanced VSAN Routing, zone-based traffic prioritizing, Extended BB\_Credits, FC write acceleration, SCSI flow statistics, FCiP encryption, SAN device virtualization and TrustSec FC Link Encryption.


**Mainframe Package** – includes features required for mainframe environments. FICON supports high-speed connectivity between mainframes and I/O devices. Features include VSAN for FICON and FCP intermixing, FICON Control Unit Port (CUP), Fabric Binding, Switch Cascading, FICON Native Mode Channel-to-Channel Operation, Persistent FICON FCID assignment, Port Swapping for host channel cable connectors, FICON Tape Acceleration. **Note:** Effective with the release of NX-OS 9.4(1a), FICON capability is embedded in the OS. Previous NX-OS releases that include FICON support will still require a separate license.

**MDS SAN Analytics** –SAN Analytics is achieved through a built-in analytics engine on the 64- and 32/Gb/s MDS director switching modules. The SAN Analytics engine can produce I/O-level metrics so you can analyze in real time all Fibre Channel exchanges and report on metrics. The MDS Analytics solution is pervasive, there's no appliance, no probes and it's always on.

## Connectrix MDS Nexus Dashboard Controller (NDFC)

Connectrix MDS Nexus Dashboard Controller (NDFC) provides management, control, automation, monitoring, visualization and troubleshooting across the Connectrix MDS SAN portfolio. NDFC manages the MDS Fibre Channel devices and all SAN configurations from an intuitive User Interface (UI) through wizards, templates and user-friendly features and functions.

The day-to-day SAN operations, such as In-Service Software Upgrades (ISSU), Zoning, Event management, Port Monitoring (PMON), etc., are managed and maintained from the simplified web UI. The application is a platform providing historical data that can be used to help during day-to-day troubleshooting, viewing analytics data and looking for SAN congestion through slow-drain analysis. NDFC is also critically important for reviewing event data, SNMP traps, syslogs and consolidated auditing and reporting. NDFC provides detailed visibility, analytics and inventory, to provide awareness of performance at a deeper level than basic monitoring.

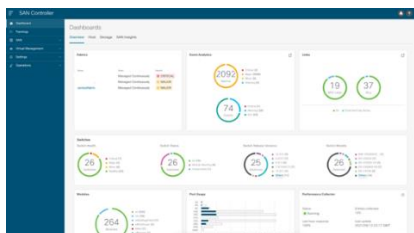

# MDS 9700 Enterprise Directors

## System Architecture

## Technical Specification

Essential chassis components	<p>MDS-9718-V3 - Base model includes six fabric modules, two supervisor modules, three fan trays and twelve power supplies. An additional four power supplies can be added to insure the highest level of power availability.</p> <p>MDS-9710-V2 - Base model includes three fabric modules, two supervisor modules, three fan trays, and six power supplies. Additional two power supplies can be added to insure the highest level of power availability.</p> <p>MDS-9706-V2 - Base model includes three fabric modules, two supervisor modules, three fan trays and four power supplies. Additional two power supplies can be added to insure the highest level of power availability.</p> <p>Note: To run at 64G speed, the MDS-9710-V2 and MDS-9706-V2 directors will need a total of <b>six</b> fabric modules.</p>
Switching modules	<p>48-port 32 Gb/s module</p> <p>48-port 64 Gb/s module</p> <p>24/10-port SAN Extension module with FCiP</p>
Cascade maximum	<p>MDS-9718 and MDS-9718-V3 – 7</p> <p>MDS-9710-V2 - 5</p> <p>MDS-9706-V2 - 7</p>
Virtual SANs (VSANs)	Up to 80 VSANs per fabric
Performance	64Gb/s Fibre Channel full duplex, 10- and 40GigE
Switch core	Non-blocking, cross bar design
Buffer credits	<p>64Gb switching module – up to 1000 buffer credits for exceptional extensibility without the need for additional licenses. With the Enterprise Package up to 16,000 buffer credits can be allocated to an individual port, enabling full link bandwidth over long distances with no degradation in link utilization.</p> <p>32Gb switching module - up to 500 per port (dedicated mode) standard and up to 8191 on individual port with Enterprise Package activated</p> <p>16Gb switching module - up to 500 per port (dedicated mode) standard and up to 4095 on individual port with Enterprise Package activated</p>
Maximum frame size	2112 bytes
Classes of service	Class 2, 3 and F
Fabric services	Simple Name Server, Registered State Change Notification (RSCN), Login Services, Fabric Configuration Service (FCS), Broadcast, In-order delivery
Fibre Channel port types	<p>Standard: E, F, FL and B</p> <p>Enhanced: SD, ST and TE</p>
Advanced functions	VSAN, IVR, PortChannel, QoS, N_Port ID Virtualization, Dynamic Ingress Rate Limiting (DIRL)
Media types	<p>Hot swappable enhanced Small Form Factor Pluggable (SFP+) transceivers</p> <p>Short wave SFP+ up to 1,640 feet/500 meters</p> <p>Longwave SFP+ up to 6.21 miles 10 km</p>
Hot swappable components	Switching modules, SFPs, Supervisor modules, power supplies, fan assembly and Fabric modules
Installation options	19-inch Electronic industries Alliances (EIA) compliant rack or the Connectrix EC-1700 cabinet
Minimum NX-OS versions	<p>MDS-9718 – 7.3</p> <p>MDS-9718-V3 - 8.4(2a)+</p> <p>MDS-9710-V2 - 8.4(1)</p> <p>MDS-9706-V2 8.4(1)</p>
Management	<p>Nexus Dashboard Fabric Controller (NDFC)</p> <p>Data Center Network Manager (DCNM)</p>
Management access	<p>MDS-9718 and MDS-9718-V3 – Ethernet RJ-45; RS-232 Console CLI RJ-45</p> <p>MDS-9710-V2 – Ethernet RJ-45; RS-232 Console CLI RJ-45</p> <p>MDS-9706-V2 – Out-of-band 10/100/1000 Ethernet port, RS-232 serial console port</p>

Physical specifications	MDS-9718 and MDS-9718-V3 Dimensions: (HxWxD) 45.25x17.3x35 inches (114.9x43.9x88.9 cm), 26RU Weight: 800 pounds fully loaded (363 kg)
	MDS-9710-V2 Dimensions: (HxWxD) 24.35x17.3x34 inches (61.9x43.9x86.4 cm), 14RU Weight: 450 pounds fully loaded (204 kg)
	MDS-9706-V2 Dimensions: (HxWxD) 15.6 x17.3x32 inches (39.62x43.9x81.3 cm), 9RU Weight: 325 pounds fully loaded (147.42 kg)
Interoperability	Refer to the Dell Technologies Support Matrix (ESM), E-Lab Navigator or E-Lab Navigator mobile app

## MDS-9700 Enterprise Directors

Power and airflow	Technical Specification
Power supply	3000W AC
Input voltage	100 to 240v AC nominal (+/- 10% full range); 50 to 60 Hz nominal (+/-3 Hz for full range)
Output voltage	1452W 50V +/-4%/28A, 3.4 V +/-4%/15A (100 to 120V AC input). 3051W 50V +/- 4%/60A and 3.4 +/- 4%/15A (200 to 240V AC input)
Airflow	<p>MDS-9718 and MDS-9718-V3- provides 30 to 100 cubic feet per minute (CFM) total flow through each line card slot depending on the line card type and the fan speed setting, With the MDS-9718 and MDS-9718-V3, the original manufacturer recommends that you maintain a minimum air space of 7 inches (17.78 cm) between walls, such as in a cabinet, on the side and on the top and bottom of the chassis. The chassis front air vents need a clearance of 12 inches, and the back-air vents need a clearance of 36 inches from a solid obstruction such as a solid wall.</p> <p>MDS-9710-V2 – front to back</p> <p>MDS-9706-V2 – front to back</p>

## MDS-9700 Enterprise Directors

Environmental specifications	Technical Specification
Temperature ambient operating	32 to 104 degrees F (0 to 40C)
Temperature ambient non-operating	-40 to 158 degrees F (-40 to 70C)
Relative humidity, ambient (non-condensing) operating	10 to 90%
Altitude operating	-197 to 6500 feet (-60 to 2000 m)

## MDS-9700 Enterprise Directors

### Regulatory compliance

### Technical Specification

Safety	CE Marker UL 60950 CAN/CSH – C22.2 No. 60950 EN 60950 AS/NZS 3260 IEC 60825 EN 60825 21CFR 1040
EMC	FCC Part 15 (CFR 47) Class A ICES-003 Class A EN 55022 Class A CISPR 22 Class A AS/NZS 3548 Class A EN 55024 EN 50082-1 EN 61000-6-1 EN 61000-3-2 EN 61000-3-3
FIPS	FIPS Certified FIPS 140-2 Level 2

## MDS-9700 Enterprise Directors

### Network security

### Technical Specification

- Per VSAN RBAC using RAIDUS and TACACS+-based authentication, authorization and accounting (AAA) functions
- VSAN Fabric Isolation
- Intelligent packet inspection at port level
- Fibre Channel Security Protocol (FC-SP) from host-to-switch and switch-to-switch authentication
- Secure File Transfer Protocol (SFTP)
- Secure Shell Version 2 (SSHv2) with Advanced Encryption Services (AES)
- Simple Network Management Protocol version 3 (SNMPv3) with Advanced Encryption Services (AES)
- Other built-in security: Control plane security, logical unit number (LUN) zoning and read-only zones, hardware enforced zoning and broadcast zones, management access FIPS 140-2 compliance. Other enhanced security features are available in the Enterprise Package.

## MDS-9700 Enterprise Directors

### Availability

### Technical Specification

Redundant, hot-swappable supervisor modules  
Redundant, hot-swappable fabric modules  
Hot swappable switching modules and hot swappable SFP+ optics

Redundant AC Input  
Redundant, hot-swappable power supplies and fans

Online, non-disruptive software upgrades and activation  
Non-disruptive subsystem maintenance

Stateful supervisor module failover

Stateful process restart

E-mail home capability with DCNM 7.2.3+

Fabric-based multipathing

Per-VSAN fabric services

Online diagnostics

Port tracking

Virtual Routing Redundancy Protocol (VRRP)



## Dell Technologies Services

Plan, deploy, manage and support IT transformation with our top-rated services

### Consulting

Dell Technologies Consulting Services provides industry professionals with a wide range of tools and the experience you need to design and execute plans to transform your business.

### Deployment

Accelerate technology adoption with ProDeploy Enterprise Suite. Trust our experts to lead deployments through planning, configuration and complex integrations.

### Management

Regain control of operations with flexible IT management options. Our Residency Services help you adopt and optimize new technologies and our Managed Services allow you to outsource portions of your environment to us.

### Support

Increase productivity and reduce downtime with ProSupport Enterprise Suite. Expert support backed by proactive and predictive artificial intelligence tools.

### Education

Dell Technologies Education Services help you develop the IT skills required to lead and execute transformational strategies. Get certified today.

Learn more at [DellTechnologies.com/Services](https://DellTechnologies.com/Services)



[Learn More](#) about Connectrix solutions



[Contact](#) a Dell Technologies Expert